




# REFRIGERATION, INC.

4800 James Savage Road ♦ Midland, Michigan 48642 ♦ USA  
T: 989-698-5500 ♦ F: 989-496-3438 ♦ E: sales@kingrefrigeration.com

## Mini-Rotary Viscometer (MRV/TP1)

### Features

- Capable of measuring over a broad temperature range of + 80°C to – 40°C (176°F to – 40°F).
- Single unit has testing capacity of up to 10 samples.
- Microprocessor temperature controllers store all MRV/TP1 testing profiles in memory.
- Unique design is fully self-contained – no external refrigeration or heating apparatus needed.
- Advanced direct refrigeration technology eliminates the need for liquid cooling mediums such as methanol.
- Removable test cells allow for easy cleaning, sample agitation and advance sample preparation.
- New rotor design eliminates possible interference with water and ice.
- Internal hermetic refrigeration system provides direct, instant cooling.
- Power-saver feature allows testing profile to resume in the event of a brief power interruption.
- Internal gas system provides a continuous blanket of dry gas over samples to eliminate moisture buildup.
- Optional KingSpec MRV Software Package available.
- Rotor stator rack supplied for convenient cleaning, drying and storage.
- Safety features include high-pressure cutout and high temperature limits.
- Rotor stator sets included with instrument. Additional sets readily available.

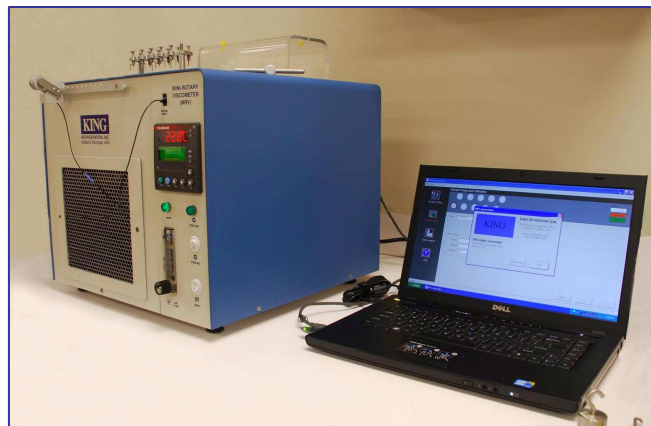

Model MRV101

### Industry Methods

- Measures apparent viscosity and yield stress of oils according to ASTM D3829, D4684, D6821\*, and D6896.
- Determines Borderline Pumping Temperature of oils according to SAE J300, ILSAC GF-3 & GF-4 specifications.

\* With available Drive Line equipment sold separately.

### Instrument Specifications

Cabinet Material	Stainless steel and durable thermoplastic
Temperature Range	+80°C to – 40°C (176°F to – 40°F)
Bath Design	Solid, direct refrigeration without liquids
Dimensions	15.5”w x 12.5”d x 13.5”H or 39 x 32 x 34 cm
Cooling Rate	5.0°C per minute maximum
Refrigerant	R-507
Compressor Size	1/3 Horsepower
Electrical	115 VAC, 15 Amp, 50/60 Hz also available 220 VAC, 7 Amp, 50/60 Hz
Temperature Control	± 0.1°C across all test cells, digital readout
Heating Capacity	600 Watts
Testing Capacity	10 samples